
KAITO PRO 30 | CEILING LIGHT | WHITE

2220516001





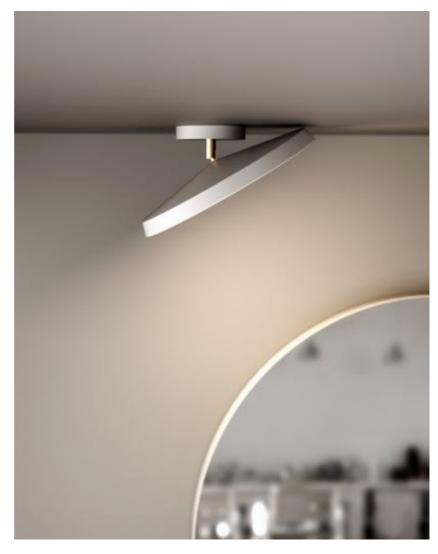

Voltage (V): 220-240 Volt

IP degree: IP20

Class (Class 1, Class 2, Class 3): Class 2 (Double isolated) Bulb base: LED Module

Parallel connection: True

Primary material: Metal

Secondary material: Metal

Color: White

Height (cm): 11.7 Width (cm): 30

Shade Diameter (cm): 30 Shade Height (cm): 4.5

Outdoor base dimension (cm):

10.6

Lenght (cm): 30

Tilt Angle (°): 35

Turning Angle (°): 350

EAN: 5704924011405

Item Number: 2220516001

Pcs Per Master Carton: 3

Sales Box Height (cm): 32.7 Sales Box Width(cm): 32.5

Sales Box Depth (cm): 14.5

Sales Box Volume m³: 0.015

Product net weight (kg): 1.785

Brightness of light (Lumen): 1560

Color Temperature (K): 3000

Ra-value: 80

Lifetime (h): 30000

Beam Angle (°): 120

Candela (cd) (for directional

lamp only): 0 Energy Class: E

· Adjustable lamp head for a directional light · Dimmable · Soft and diffused light · Slim design · Elegant brass detail · 5 year LED guarantee

With Kaito Pro, Bønnelycke MDD has created a ceiling fixture that breaks with tradition. A ceiling fixture where design and innovation merge into something greater. The shape stands out as sharp, modern and as a uniform, luminous surface. The functional kip joint, made from brass, adds an elegant superiority to the design. Fixed 24W LED panel.

KAITO PRO 30 | CEILING LIGHT | BLACK

2220516003







Voltage (V): 220-240 Volt

IP degree: IP20

Class (Class 1, Class 2, Class 3): Class 2 (Double isolated)

Bulb base: LED Module Parallel connection: True

Primary material: Metal

Secondary material: Metal

Color: Black

Height (cm): 11.7 Width (cm): 30

Shade Diameter (cm): 30 Shade Height (cm): 4.5

Outdoor base dimension (cm):

10.6

Lenght (cm): 30

Tilt Angle (°): 35

Turning Angle (°): 350

EAN: 5704924011412

Item Number: 2220516003 Pcs Per Master Carton: 3

Sales Box Height (cm): 32.7

Sales Box Width(cm): 32.5 Sales Box Depth (cm): 14.5

Sales Box Volume m3: 0.0154

Product net weight (kg): 1.785

Brightness of light (Lumen): 1560

Color Temperature (K): 3000 Ra-value: 80

Lifetime (h): 30000

Beam Angle (°): 120

Candela (cd) (for directional

lamp only): 0 Energy Class: E

· Adjustable lamp head for a directional light · Dimmable · Soft and diffused light · Slim design · Elegant brass detail · 5 year LED guarantee

With Kaito Pro, Bønnelycke MDD has created a ceiling fixture that breaks with tradition. A ceiling fixture where design and innovation merge into something greater. The shape stands out as sharp, modern and as a uniform, luminous surface. The functional kip joint, made from brass, adds an elegant superiority to the design. Fixed 24W LED panel.